AD-A154 287   USE OF A TWO-DIMENSIONAL FLOW MODEL TO QUANTIFY AQUATIC   1/1
              HABITAT(U) HYDROLOGIC ENGINEERING CENTER DAVIS CA
   D M GEE ET AL. APR 85 HEC-TP-105

UNCLASSIFIED   F/G 6/6   NL

END
FILMED

DTIC

1.0

4.5
5.0
5.6

2.8

2.5

1.1

3.2

3.6

4.0

2.2

2.0

1.8

1.25

1.4

1.6

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

**US Army Corps
of Engineers**

The Hydrologic
Engineering Center

AD-A154 287

# Use of a Two-Dimensional Flow Model

to Quantify Aquatic Habitat

by

D. Michael Gee

Daniel B. Wilcox

DTIC
ELECTE
MAY 2 9 1985
S D
A

Technical Paper No. 105

April 1985

85   5   23   128

Papers in this series have resulted from technical activities of
the Hydrologic Engineering Center. Versions of some of these
have been published in technical journals or in conference proceedings.
The purpose of this series is to make the information available for use
in the Center's training program and for distribution within the Corps of
Engineers.

The findings in this report are not to be construed as an official Department
of the Army position unless so designated by other authorized documents.

The contents of this report are not to be used for advertising, publication,
or promotional purposes. Citation of trade names does not constitute an official
endorsement or approval of the use of such commercial products.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Technical Paper No. 105	2. GOVT ACCESSION NO. AD-A154 987	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Use of a Two-Dimensional Flow Model to Quantify Aquatic Habitat		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) D. Michael Gee and Daniel B. Wilcox		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Corps of Engineers Hydrologic Engineering Center 609 Second Street, Davis, California 95616		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE April 1985
		13. NUMBER OF PAGES 10
14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Distribution of this paper is unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

Presented at the American Society of Civil Engineers Specialty Conference on Computer Applications in Water Resources, Buffalo, NY, 10-12 June 1985.

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Numerical Models, Finite Elements, Computational Hydraulics, Aquatic Habitat

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

This paper describes the use of a numerical two-dimensional flow model to evaluate the impacts of potential hydropower retrofits on downstream flow distributions at Lock and Dam No. 8 on the upper Mississippi River. The model used (RMA-2) solves the complete Reynolds equations for two-dimensional free-surface flow in the horizontal plane using a finite element solution scheme. RMA-2 has been in continuing use and development at the Hydrologic Engineering Center and elsewhere for the past decade. Although designed primarily for
(Continued)

DD FORM 1473 JAN 73   EDITION OF 1 NOV 65 IS OBSOLETE

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

20. Continued

the simulation of hydraulic conditions, RMA-2 may be used in conjunction with related numerical models to simulate sediment transport and water quality. In this study, velocity distributions were evaluated with regard to environmental, navigational and small-boat safety considerations. Aquatic habitat was defined by depth, substrate type and current velocity. Habitat types were quantified by measuring the areas between calculated contours of velocity magnitude (isotachs) for existing and project conditions. The capability for computing and displaying isotachs for the depth-average velocity, velocity one foot from the bottom and near the water surface was developed for this study. The product of this study effort is an application of the RMA-2 model that allows prediction of structural aquatic habitat in hydraulically complex locations. Elements of the instream flow group methodology could be incorporated to provide detailed predictions of impacts of habitat quality.

Calibration of the numerical model to field measurements of velocity magnitude and direction is also described.

Use of a Two-Dimensional Flow Model to Quantify Aquatic Habitat
by
D. Michael Gee[1] and Daniel B. Wilcox[2]

Introduction

This paper describes the use of a numerical two-dimensional flow
model to evaluate the impacts of potential hydropower retrofits on
downstream flow distributions at Lock and Dam No. 8 (Fig. 1) on the
upper Mississippi River. The model used (RMA-2 (6)) solves the
complete Reynolds equations for two-dimensional free-surface flow in
the horizontal plane using a finite element solution scheme. RMA-2
has been in continuing use and development at the Hydrologic
Engineering Center and elsewhere for the past decade (2,3,4,5).
Although designed primarily for the simulation of hydraulic
conditions, RMA-2 may be used in conjunction with related numerical
models to simulate sediment transport and water quality (5,7). In
this study, velocity distributions were evaluated with regard to
environmental, navigational and small-boat safety considerations.
Aquatic habitat was defined by depth, substrate type and current
velocity. Habitat types were quantified by measuring the areas
between calculated contours of velocity magnitude (isotachs) for
existing and project conditions. The capability for computing and
displaying isotachs for the depth-average velocity, velocity one
foot from the bottom and near the water surface was developed for
this study. The product of this study effort is an application of
the RMA-2 model that allows prediction of structural aquatic habitat
in hydraulically complex locations. Elements of the instream flow
group methodology (1) could be incorporated to provide detailed
predictions of impacts to habitat quality.

Calibration of the numerical model to field measurements of
velocity magnitude and direction is also described.

Project Description:

Lock and Dam No. 8 is located on the upper Mississippi River
679.2 river miles (1094 km) above the mouth of the Ohio River, 23.3
miles (37.5km) below Lock and Dam No. 7, and 31.3 river miles

---

[1] Chief, Computer Support Center
The Hydrologic Engineering Center
U.S. Army Corps of Engineers
609 Second Street
Davis, California

[2] Fisheries Biologist
St. Paul District, U.S. Army Corps of Engineers
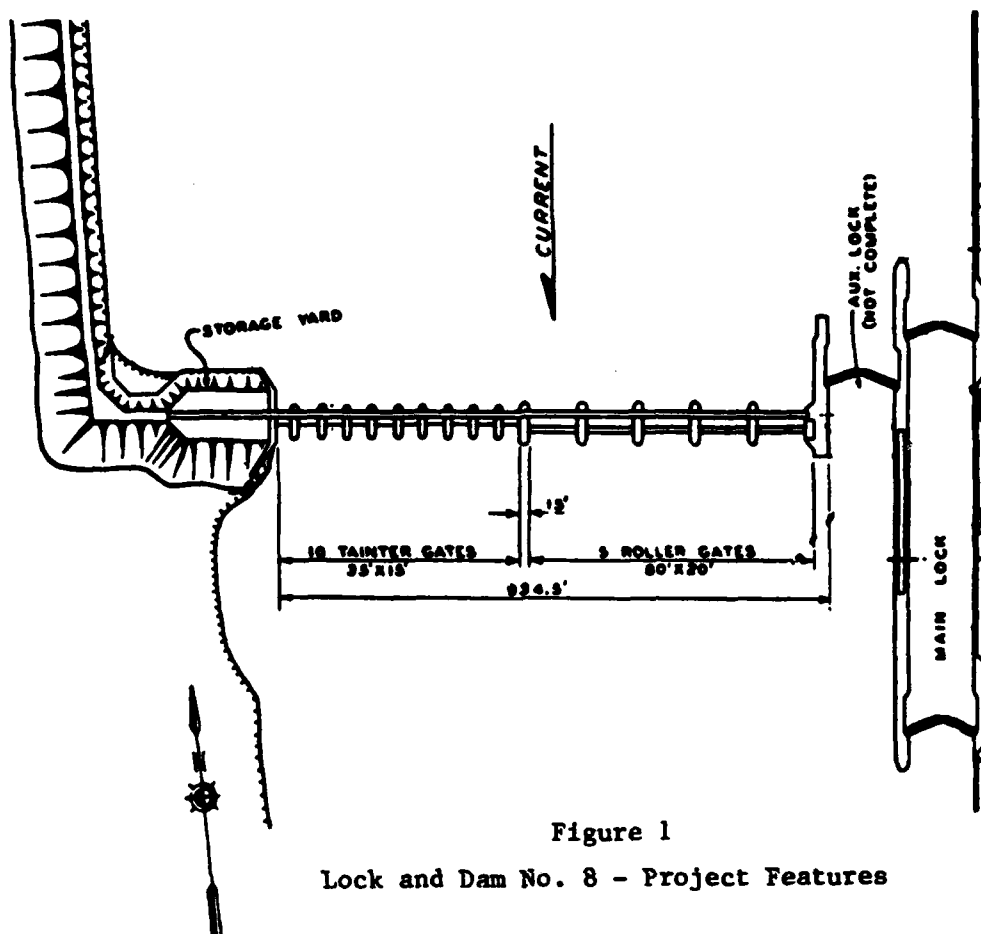St. Paul, Minnesota

1

Figure 1

Lock and Dam No. 8 - Project Features

(50.4km) above Lock and Dam No. 9. The lock is on the left bank, or
Wisconsin side of the river 0.3 miles (0.5 km) below the village of
Genoa, Wisconsin, which is on State Highway No. 35, 17 miles (27 km)
south of the City of La Crosse, Wisconsin.

The main lock is 110 feet (33.6 m) wide and 600 feet (182 m)
long, and the upper gate bay of an auxiliary lock is provided in the
event it becomes necessary to add another lock in the future. From
the river wall of the auxiliary lock, a movable dam section
consisting of five roller gates, 20 feet (6.1 m) x 80 feet (24.4 m),
and 10 tainter gates, 15 feet (4.6 m) x 35 feet (10.7 m), extends
across the main channel to the right bank of the river.

Hydropower installations were being considered by the Corps of
Engineers for the storage yard at the west abutment or in the
auxiliary lock location. In addition to the Corps plans, privately
funded installation of floating powerplants, "hydrobarges", is being
considered for some of the roller gate bays.

Network Development:

A key component of the successful application of RMA-2 is the
development of a well designed finite element network that accurately

2

represents flow boundaries, bottom topography, inflow and outflow locations, and contains enough detail to resolve flow patterns of interest. A study area was selected extending from the downstream face of the dam downstream approximately 2.2 miles (3.5 km). The downstream boundary was set at approximately river mile 677 (km 1090). This location was judged to be sufficiently far downstream from the dam that differing flow distributions at the structure, representing the different project configurations, would not affect the water surface elevation (assumed horizontal) at the boundary.

Bathymetry for the study reach was provided at 1:2400 map scale with a 5 ft. (1.5 m) contour interval. A finite element network was constructed to define the study area with adequate detail at the dam face to distinguish releases from individual spillway bays. Several wing dams and training structures within the study reach are reflected in the network as well as a large island in the lower half of the reach (Fig. 2). Curved-sided elements were used along lateral flow boundaries to allow for smooth tangential flows at the sides (slip flow boundary conditions). The network was revised somewhat during calibration. The final network consisted of 375 elements and 1,189 nodes. Both triangular and quadrilateral elements were used.

Boundary Conditions:

Boundary condition selection was straightforward for this study. Releases from the spillway bays and/or powerplants were described as flows. The downstream boundary condition was a specified water surface elevation, assumed horizontal across the river. That elevation was varied, depending upon the flow magnitude, based upon information provided by the St. Paul District. Lateral boundaries were generally "slip" conditions which allow flow parallel to the boundary. In some cases where sharp corners exist on the boundary a zero velocity was specified (stagnation point boundary condition). All simulations assumed steady flow, although RMA-2 can readily be used to simulate unsteady flow problems as well.

Calibration:

An essential ingredient to any modeling effort, be it physical or numerical, is calibration of various model parameters or coefficients such that model results acceptably reproduce prototype observations. The parameters available for calibration of RMA-2 are bottom roughness and turbulent exchange coefficients. Calibration strategy typically consists of estimation of bottom roughness values (based upon knowledge of bed material) followed by adjustment to reproduce prototype head loss within the study reach. Turbulent exchange coefficients are then adjusted to reproduce details of prototype velocity distributions. Thus, it is desirable to have prototype measurements of velocity (magnitude and direction).

Velocity measurements were obtained at ten transects in the study reach. Coverage was very good consisting of up to five point measurements at each of up to ten locations across each transect. This calibration data set was obtained during the period 15-16 August 1984 at a river flow of 25,400 cfs (711 m³/sec) using a
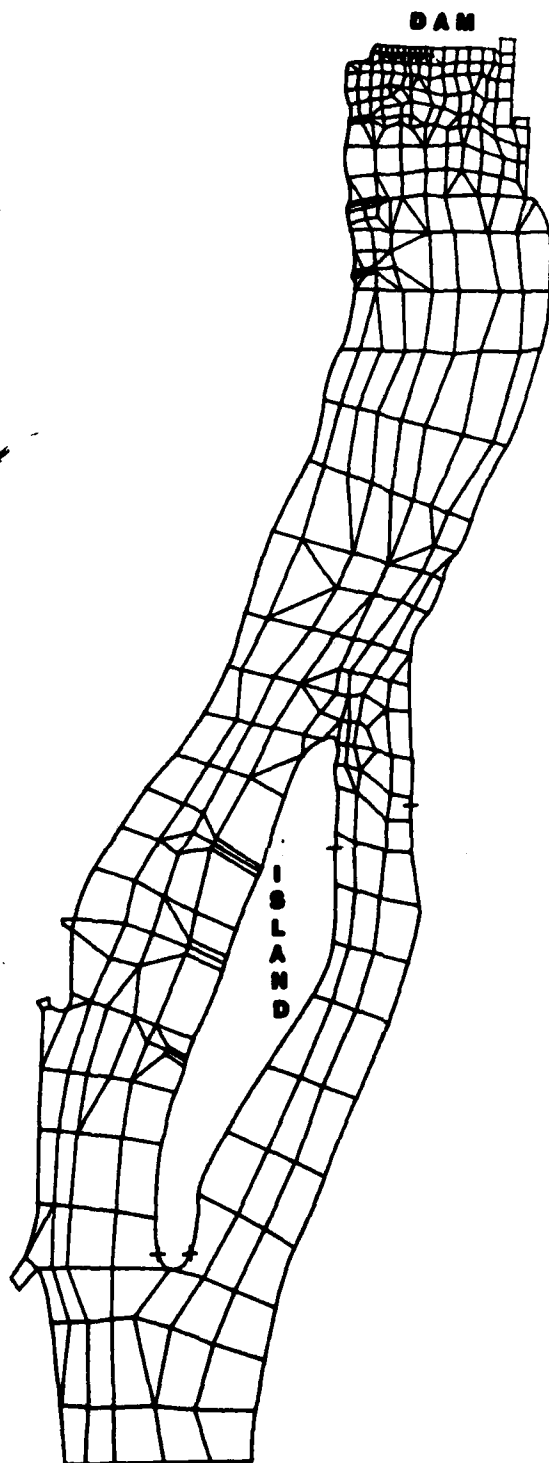
3

DAM

ISLAND

Figure 2

Finite Element Network - Flow is from Top to Bottom

4

Price Meter. Although the Price meter only yields directional information for near-surface measurements, these directions were assumed to apply to the entire water column at each point.

Based upon these velocity measurements, roughness coefficients were adjusted to match the flow distribution around the island indicated by the data; approximately 65% to the west, 35% to the east. Additionally, the transverse velocity distributions at certain transects were not symmetric, with lower velocities on the right (west) side than on the left. This did not appear to be entirely due to the presence of the right bank wing dams, therefore, the bottom roughness was increased along the right side of the channel from the wing dams to about the head of the island to reproduce the skewed velocity distributions (see Figure 3). Roughness used, in terms of Manning n-values, varied from 0.030 to 0.060.

The turbulent exchange coefficients were set at 25 pound-second/feet^2 (120 kg-sec/m^2) for small elements and 50 pound-second/feet^2 (240 kg-sec/m^2) for all others. This set of coefficients and network yielded well-behaved numerical solutions that generally converged in four iterations. Internal continuity checks, an indicator of network adequacy, were generally within $\pm$ 5%.
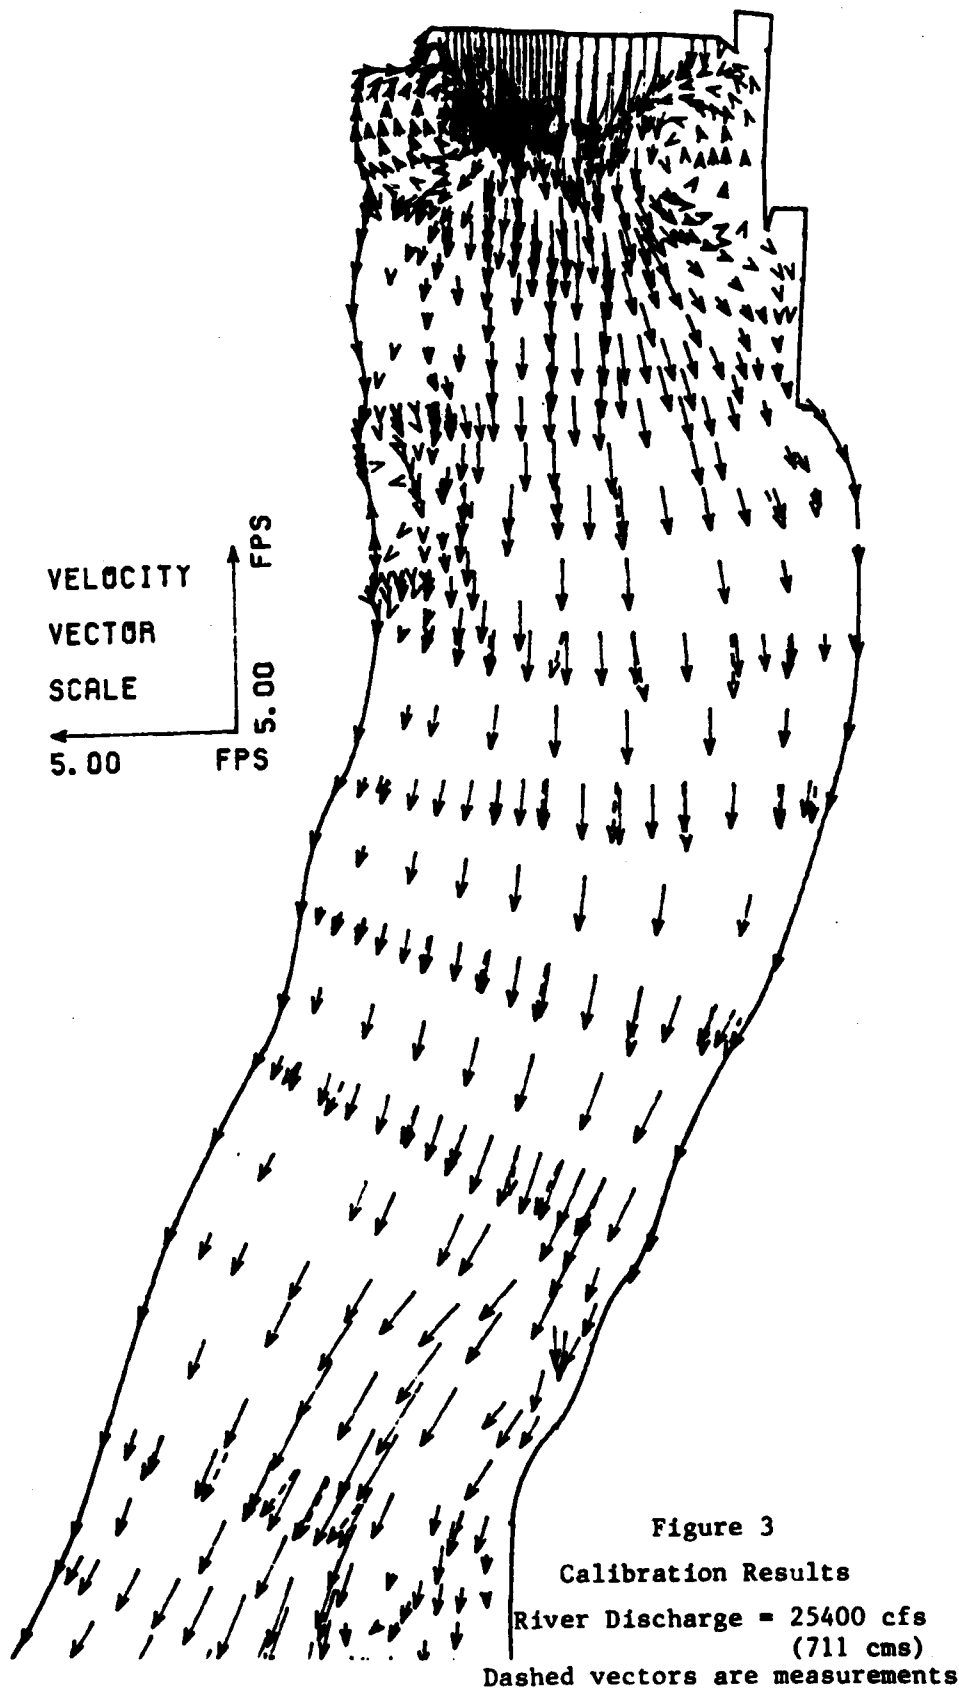
Calibration of a numerical two-dimensional flow model such as RMA-2 is a judgmental process. That is, no objective, or statistical, measures of error between measured and simulated velocities or water surface elevations are used. In this study, plots of velocity vectors (observed and simulated) were examined visually. Coefficients were then adjusted until, in the judgment of the modeler, an acceptable balance was achieved between reproduction of the measurements and physically realistic coefficient values. Some network modifications were made. Additional detail was added in some areas to better reproduce observed velocity gradients. A portion of the simulated and measured flow fields is shown in Figure 3.

Production Simulations:

All project (i.e., hydropower) simulations were made in conjunction with a corresponding existing (i.e., no hydropower) condition simulation. Thus, project impacts are defined as differences between project and existing conditions. Approximately 25 different conditions were analyzed.

Results of the numerical simulations were presented in the following formats for further analysis:

1. Plots of velocity vectors approximately one foot (0.3 m) above the bottom.

2. Plots of velocity vectors near the water surface.

3. Plots of velocity vectors of vertically averaged velocity (the model output).

VELOCITY
VECTOR
SCALE

FPS

5.00

5.00   FPS

Figure 3

Calibration Results

River Discharge = 25400 cfs
(711 cms)

Dashed vectors are measurements

6

4. Isotachs (i.e., contours of equal velocity magnitude) one foot (0.3 m) above the bottom.

5. Isotachs near the surface.

6. Pathline plots depicting paths taken by particles traveling at the vertically-averaged velocity released at various points.

These plots are not reproduced herein in their entirety due to space limitations; examples of the above graphical displays are shown in Figures 4-6.

The velocities near the bottom and surface were estimated from the computed vertically-averaged velocity by fitting a classic logarithmic velocity profile at each point.

Interpretation of Results

Riverine habitat types, defined by substrate type, depth, and current velocity, vary in areal extent and distribution with river discharge. The location and extent of habitats in the tailwater of lock and dam 8 were quantified using the model simulations of current velocity at one foot above the bottom. Model results indicate that hydropower operation would affect the pattern of habitat types only within 2,000 feet (610 m) of the dam. The greatest net change in aquatic habitat between existing and with-project conditions would occur at the lowest river discharges. Model results indicate that hydropower operation would cause little disruption of habitat types and fish distribution during the high discharge period in spring when saugers, walleyes, and anglers congregate below the dam.

An analysis similar to that used to quantify aquatic habitat at lock and dam 8 could be used to evaluate effects of hydropower operation on navigation, by employing simulations of surface currents.

Conclusions

The application of RMA-2 described herein represents a new use of the model that had previously been used for hydraulic, water quality, and sediment transport studies. The importance of graphics post processors for interpretation of the results of two-dimensional flow simulations is highlighted in this study. The methods of extracting meaningful information from simulated flow fields illustrated herein should prove valuable for habitat evaluation in general.
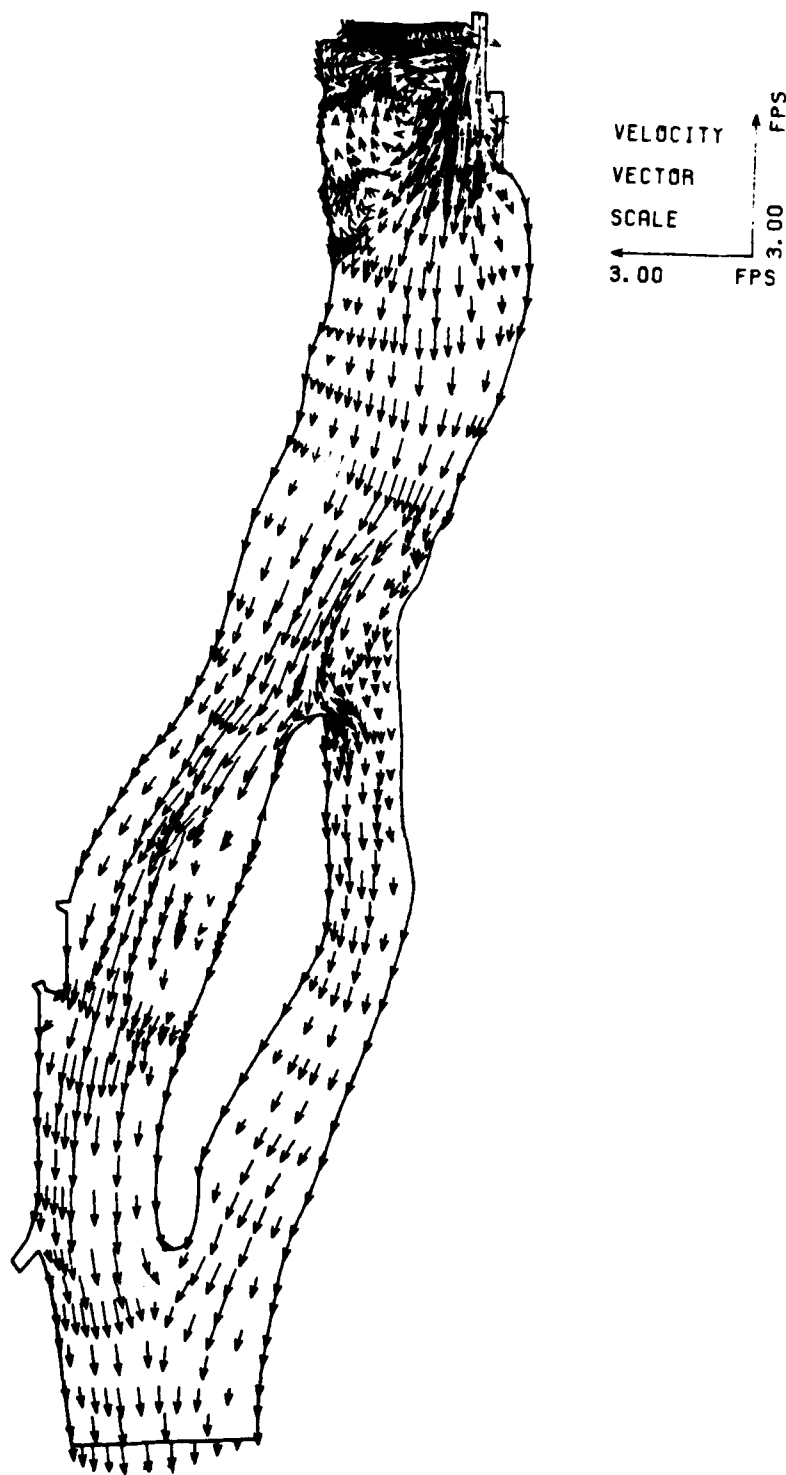
Acknowledgements

Figure 4   Example Vector Plot

Spillway Discharge = 3000 cfs (84 cms)
Powerplant Discharge = 7000 cfs (196 cms)
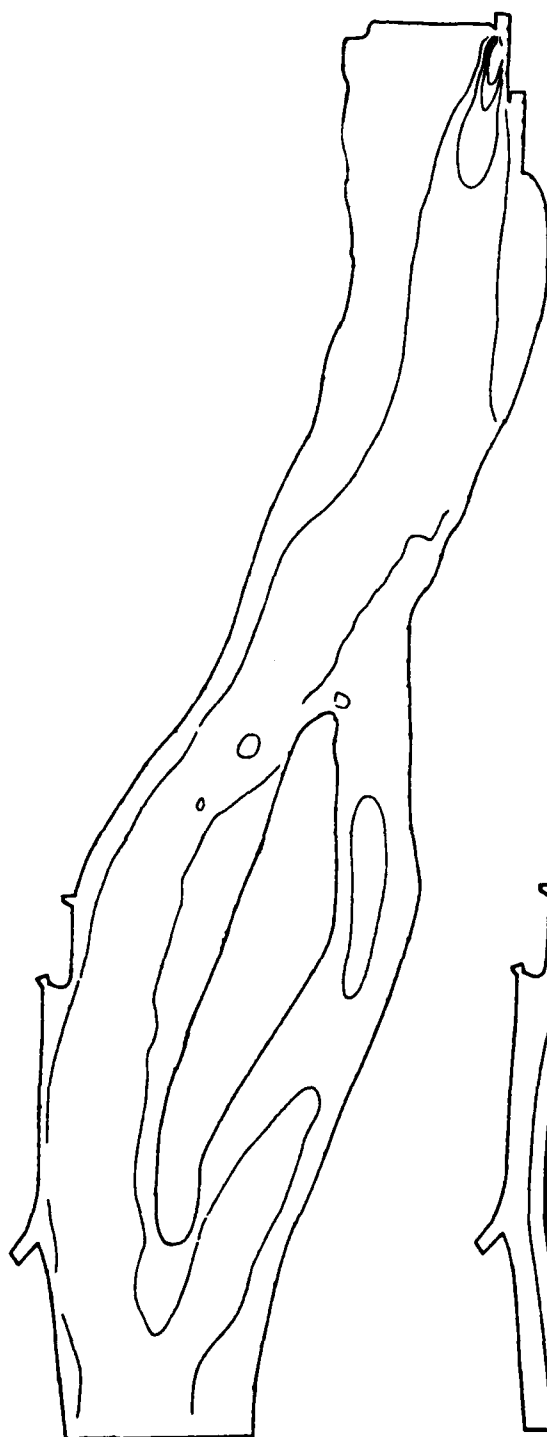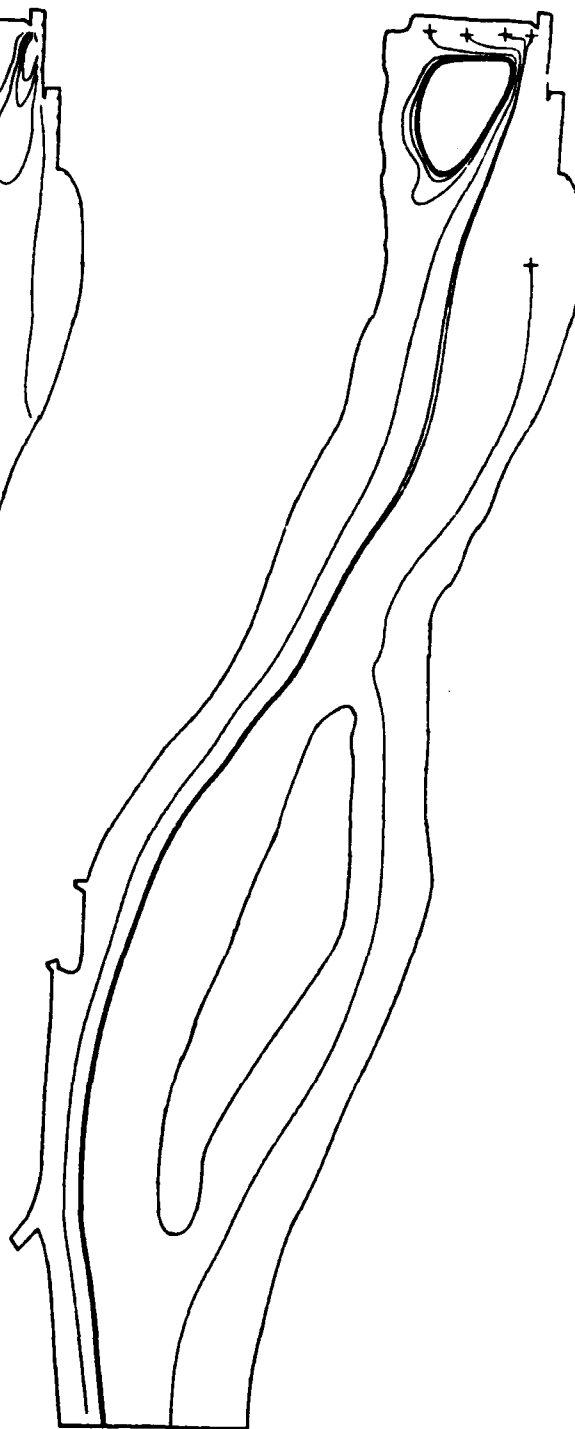(located in auxiliary lock)

Figure 5
Example Isotach Plot

Figure 6
Example Pathline Plot

Spillway Discharge = 3000 cfs (84 cms)
Powerplant Discharge = 7000 cfs (196 cms)
(located in auxiliary lock)

References

1. Bovee, K.D. and Milhous, R.T.,"Hydraulic Simulation in Instream
    Flow Studies: Theory and Techniques." Instream Flow Information
    Paper No. 5, Cooperative Instream Flow Service Group, Ft.
    Collins, CO, 1978.

2. Gee, D.M. and MacArthur, R.C., "Development of Generalized Free
    Surface Flow Models Using Finite Element Techniques," Finite
    Elements in Water Resources; Proceedings of the Second
    International Conference on Finite Elements in Water Resources,
    Pentech Press, July 1978. (Also published as HEC Technical
    Paper No. 53.)

3. Gee, D.M. and MacArthur, R.C., "Evaluation and Application of
    the Generalized Finite Element Hydrodynamic Model RMA-2,"
    Proceedings of the First National U.S. Army Corps of Engineers-
    Sponsored Seminar on Two-Dimensional Flow Modeling held at The
    Hydrologic Engineering Center, Davis, California, July 7-9, 1981.

4. Gee, D.M., "Calibration, Verification and Application of a
    Two-Dimensional Flow Model," Frontiers in Hydraulic Engineering,
    Proceedings of the American Society of Civil Engineers Hydraulics
    Division Specialty Conference held at the Massachusetts Institute
    of Technology, Cambridge, Massachusetts, August 9-12, 1983.
    (Also published as HEC Technical Paper No. 90)

5. McAnally, W.H., et. al., "Application of Columbia Hybrid Modeling
    System," Journal of Hydraulic Engineering, American Society of
    Civil Engineers, Vol. 110, No. 5, May 1984, pp. 627-642.

6. Norton, W.R. and King, I.P., "User's Guide and Operating
    Instructions for The Computer Program RMA-2," report to The
    Sacramento District, U.S. Army Corps of Engineers, Resource
    Management Associates, December 1976.

7. U.S. Army Engineer District, San Francisco, "Numerical Simulation
    of the Circulation and Water Quality within Fisherman's Wharf
    Harbor," August 1984, at press.

TECHNICAL PAPERS (TP)

Technical papers are written by the staff of the HEC, sometimes in collaboration with persons from other organizations, for presentation at various conferences, meetings, seminars and other professional gatherings.

This listing includes publications starting in 1978.

HEC NUMBER	TITLE	HEC PRICE	NTIS NUMBER
		$2.00 Each	
TP-52	Potential Use of Digital Computer Ground Water Models, D. L. Gundlach, Apr 78, 38 pp.		ADA-106 251
TP-53	Development of Generalized Free Surface Flow Models Using Finite Element Techniques, D. M. Gee and R. C. MacArthur, Jul 78, 21 pp.		ADA-106 252
TP-54	Adjustment of Peak Discharge Rates for Urbanization, D. L. Gundlach, Sep 78, 7 pp.		ADA-106 253
TP-55	The Development and Servicing of Spatial Data Management Techniques in the Corps of Engineers, R. P. Webb and D. W. Davis, Jul 78, 26 pp.		ADA-106 254
TP-56	Experiences of the Hydrologic Engineering Center in Maintaining Widely Used Hydrologic and Water Resource Computer Models, B. S. Eichert, Nov 78, 16 pp.		ADA-106 255
TP-57	Flood Damage Assessments Using Spatial Data Management Techniques, D. W. Davis and R. P. Webb, May 78, 27 pp.		ADA-106 256
TP-58	A Model for Evaluating Runoff-Quality in Metropolitan Master Planning, L. A. Roesner, H. M. Nichandros, R. P. Shubinski, A. D. Feldman, J. W. Abbott, and A. O. Friedland, Apr 72, 81 pp.		ADA-106 257

TECHNICAL PAPERS (TP)(Continued)

HEC NUMBER	TITLE	HEC PRICE	NTIS NUMBER
		$2.00 Each	
TP-59	Testing of Several Runoff Models on an Urban Watershed, J. Abbott, Oct 78, 53 pp.		ADA-106 258
TP-60	Operational Simulation of a Reservoir System with Pumped Storage, G. F. McMahon, V. R. Bonner and B. S. Eichert, Feb 79, 32 pp.		ADA-106 259
TP-61	Technical Factors in Small Hydropower Planning, D. W. Davis, Feb 79, 35 pp.		ADA-109 757
TP-62	Flood Hydrograph and Peak Flow Frequency Analysis, A. D. Feldman, Mar 79 21 pp.		ADA-109 758
TP-63	HEC Contribution to Reservoir System Operation, B. S. Eichert and V. R. Bonner, Aug 79, 28 pp.		ADA-109 759
TP-64	Determining Peak-Discharge Frequencies in an Urbanizing Watershed: A Case Study, S. F. Daly and J. C. Peters, Jul 79, 15 pp.		ADA-109 760
TP-65	Feasibility Analysis in Small Hydropower Planning, D. W. Davis and B. W. Smith, Aug 79, 20 pp.		ADA-109 761
TP-66	Reservoir Storage Determination by Computer Simulation of Flood Control and Conservation Systems, B. S. Eichert, Oct 79, 10 pp.		ADA-109 762
TP-67	Hydrologic Land Use Classification Using LANDSAT, R. J. Cermak, A. D. Feldman and R. P. Webb, Oct 79, 26 pp.		ADA-109 763
TP-68	Interactive Nonstructural Flood-Control Plannng, D. T. Ford, Jun 80, 12 pp.		ADA-109 764

2

HEC NUMBER	TITLE	HEC PRICE	NTIS NUMBER
		$2.00 Each	
TP-69	Critical Water Surface by Minimum Specific Energy Using the Parabolic Method, B. S. Eichert, 1969, 15 pp.		ADA-951 599
TP-70	Corps of Engineers Experience with Automatic Calibration of a Precipitation-Runoff Model, D. T. Ford, E. C. Morris, and A. D. Feldman, May 80, 12 pp.		ADA-109 765
TP-71	Determination of Land Use from Satellite Imagery for Input to Hydrologic Models, R. P. Webb, R. Cermak, and A. D. Feldman, Apr 80, 18 pp.		ADA-109 766
TP-72	Application of the Finite Element Method to Vertically Stratified Hydrodynamic Flow and Water Quality, R. C. MacArthur and W. R. Norton, May 80, 12 pp.		ADA-109 767
TP-73	Flood Mitigation Planning Using HEC-SAM, D. W. Davis, Jun 80, 17 pp.		ADA-109 756
TP-74	Hydrographs by Single Linear Reservoir Model, J. T. Pederson, J. C. Peters, and O. J. Helweg, May 80, 17 pp.		ADA-109 768
TP-75	HEC Activities in Reservoir Analysis, V. R. Bonner, Jun 80, 10 pp.		ADA-109 769
TP-76	Institutional Support of Water Resource Models, J. C. Peters, May 80, 23 pp.		ADA-109 770
TP-77	Investigation of Soil Conservation Service Urban Hydrology Techniques, D. G. Altman, W. H. Espey, Jr. and A. D. Feldman, May 80, 14 pp.		ADA-109 771
TP-78	Potential for Increasing the Output of Existing Hydroelectric Plants, D. W. Davis and J. J. Buckley, Jun 81, 20 pp.		ADA-109 772

HEC NUMBER	TITLE	HEC PRICE	NTIS NUMBER
		$2.00 Each	
TP-79	Potential Energy and Capacity Gains from Flood Control Storage Reallocation at Existing U. S. Hydropower Reservoirs, B. S. Eichert and V. R. Bonner, Jun 81, 18 pp.		ADA-109 787
TP-80	Use of Non-Sequential Techniques in the Analysis of Power Potential at Storage Projects, G. M. Franc, Jun 81, 18 pp.		ADA-109 788
TP-81	Data Management Systems for Water Resources Planning, D. W. Davis, Aug 81, 12 pp.		ADA-114 650
TP-82	The New HEC-1 Flood Hydrograph Package, A. D. Feldman, P. B. Ely and D. M. Goldman, May 81, 28 pp.		ADA-114 360
TP-83	River and Reservoir Systems Water Quality Modeling Capability, R. G. Willey, Apr 82, 15 pp.		ADA-114 192
TP-84	Generalized Real-Time Flood Control System Model, B. S. Eichert and A. F. Pabst, Apr 82, 18 pp.		ADA-114 359
TP-85	Operation Policy Analysis: Sam Rayburn Reservoir, D. T. Ford, R. Garland and C. Sullivan, Oct 81, 16 pp.		ADA-123 526
TP-86	Training the Practitioner: The Hydrologic Engineering Center Program, W. K. Johnson, Oct 81, 20 pp.		ADA-123 568
TP-87	Documentation Needs for Water Resources Models, W. K. Johnson, Aug 82, 16 pp.		ADA-123 558
TP-88	Reservoir System Regulation for Water Quality Control, R.G. Willey, Mar 83, 18 pp.		ADA-130 829
TP-89	A Software System to Aid in Making Real-Time Water Control Decisions, A. F. Pabst and J. C. Peters, Sep 83, 17 pp.		ADA-138 616

HEC NUMBER	TITLE	HEC PRICE	NTIS NUMBER
		$2.00 Each	
TP-90	Calibration, Verification and Application of a Two-Dimensional Flow Model, D. M. Gee, Sep 83, 6 pp.		ADA-135 668
TP-91	HEC Software Development and Support, B. S. Eichert, Nov 83, 12 pp.		ADA-139 009
TP-92	Hydrologic Engineering Center Planning Models D. T. Ford and D. W. Davis, Dec 83, 17 pp.		ADA-139 010
TP-93	Flood Routing Through A Flat, Complex Floodplain Using A One-Dimensional Unsteady Flow Computer Program, J. C. Peters, Dec 83, 8 pp.		ADA-139 011
TP-94	Dredged-Material Disposal Management Model, D. T. Ford, Jan 84, 18 pp.		ADA-139 008
TP-95	Infiltration and Soil Moisture Redistribution in HEC-1, A. D. Feldman, Jan 84,		ADA-141 626
TP-96	The Hydrologic Engineering Center Experience in Nonstructural Planning, W. K. Johnson and D. W. Davis, Feb 84, 7 pp.		ADA-141 860
TP-97	Prediction of the Effects of a Flood Control Project on a Meandering Stream, D. M. Gee, Mar 84, 12 pp.		ADA-141 951
TP-98	Evolution in Computer Programs Causes Evolution in Training Needs: The Hydrologic Engineering Center Experience, V. R. Bonner, Jul 84, 20 pp.		
TP-99	Reservoir System Analysis for Water Quality, J. H. Duke, D. J. Smith and R. G. Willey, Aug 84, 27 pp.		

HEC NUMBER	TITLE	HEC PRICE	NTIS NUMBER
		$2.00 Each	

TP-100   Probable Maximum Flood Estimation - Eastern
         United States, P. B. Ely and J. C. Peters,
         Jun 84, 5 pp.

TP-101   Use of Computer Program HEC-5 For Water
         Supply Analysis, R. J. Hayes and
         Bill S. Eichert, Aug 84, 7 pp.

TP-102   Role of Calibration in the Application
         of HEC-6, D. Michael Gee, Dec 84,
         19 pp.

TP-103   Engineering and Economic Considerations
         in Formulating Nonstructural Plans,
         M. W. Burnham, Jan 85, 16 pp.

TP-104   Modeling Water Resources Systems for
         Water Quality, R. G. Willey,
         D. J. Smith and J. H. Duke,
         Feb 84, 10 pp.

TP-105   Use of a Two-Dimensional Flow Model to
         Quantify Aquatic Habitat, D. Michael
         Gee and Daniel B. Wilcox, Apr 85, 10 pp.

END

FILMED

7-85

DTIC